

WESTON™ 618F phosphite

Phosphite Antioxidant

Contact
AKROCHEM
 CORPORATION
 (330) 535-2100 (800) 321-2260
 Fax (330) 535-8947
info@akrochem.com / www.akrochem.com


Description

WESTON™ 618F phosphite is a phosphite that is a highly effective color and molecular weight stabilizer for polyolefins, polyesters, elastomers, styrenics, engineering thermoplastics, and adhesive formulations. It also contributes to the thermal and UV stability of these polymers. This product is available in a flake form.

Chemical Structure

Distearyl Pentaerythritol Diphosphite $C_{41}H_{82}O_6P_2$

Chemical Abstract Number: 3806-34-6



Typical physical properties of WESTON™ 618F phosphite

Appearance	White Flakes
Specific Gravity @ 60°C/15.5°C	0.920-0.935
Acid No. (mg KOH/g)	1.0 max
Refractive Index @ 60°C (140°F)	1.4560 - 1.4590
Phosphorus Content (%)	7.8-8.2
Flash Point (Pensky-Martens Closed Cup)	185°C (365°F)
Bulk Density [lb./ft ³] & [g/ml]	27 & 0.43
Melt Range	37-46°C (99-115°F)
Formula Weight	732

Solubility @ 25°C (77°F)g/100g

Acetone	0.3	Cyclohexane	20.0
Benzene	14.7	Hexane	25.0
Chloroform	45.0	Toluene	30.0
Corn oil	0.4	Water	<0.1

Note: Solutions may be cloudy.

Soluble in most common aprotic organic solvents

Product Features


- Excellent color stability during processing, fabrication and end use
- Polymer protection from degradation during processing
- Reduced discoloration of polymers containing pigments such as TiO₂
- Reduced discoloration of polymers that are stabilized with a sulfur-containing, nickel-organic complex and are processed at high temperatures
- Synergism when used with light stabilizers such as benzophenones and benzotriazoles
- High performance at low loading levels for more cost-effective formulations

Food Contact Regulatory Status

For details please contact SI Group Regulatory Affairs

Volatility by Thermal Gravimetric Analysis

Conditions: Nitrogen atmosphere @ 20°C (36°F)/minute.

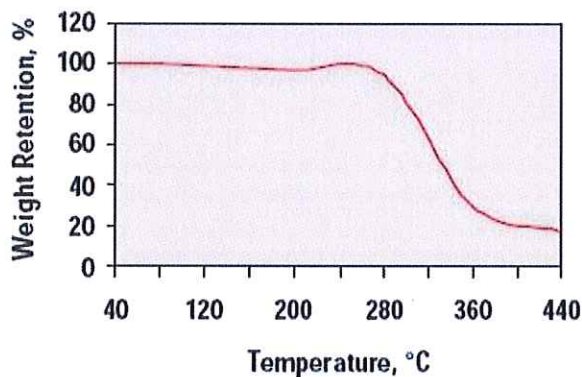


The foregoing product brand is a trademark of one or more SI Group, Inc. affiliated companies. SI Group, The Substance Inside and the SI Group logo are Reg. U.S. Pat. & Tm Off. and additional countries, to SI Group, Inc.

The information presented herein is believed to be accurate and reliable, but is presented without guarantee or responsibility on the part of SI Group, Inc. and its affiliated companies to ensure the accuracy or reliability of the information. Customers should contact SI Group account representatives for current information. It is the responsibility of the user to comply with all applicable laws and regulations relating to use of the product and to provide for a safe workplace. The user should consider all information contained herein only as a guide, and should take precautions that the user considers necessary or prudent to promote a safe work environment, such as considering all applicable health and safety hazards, developing safe work practice procedures and properly instructing employees, and reviewing the Safety Data Sheet (SDS) and product label for safety information.

Viscosity vs. Temperature

WESTON™ 618F phosphites tested in air.

Heating rate 5°C/minute

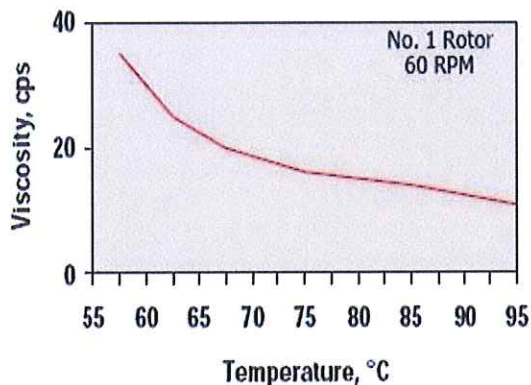

Storage and Handling

The product may be stored at least one (1) year in sealed containers. Containers should be stored in a cool, dry area. Extended storage at elevated temperatures or exposure to direct heat could decrease product shelf life. Containers should be kept sealed when not in use. Open containers should be used as soon as possible (maximum 4 months) to avoid hydrolysis, especially during humid weather.

For additional handling and toxicological information consult the SI Group Material Safety Data Sheet.