

WESTON™ TNPP phosphite


Phosphite Antioxidant

Description

WESTON™ TNPP phosphite is a versatile phosphite stabilizer which is useful in a large number of polymers such as HDPE, LLDPE, SBR, ABS, PVC and others. In most polymers, **WESTON™ TNPP phosphite** is a cost-effective, high purity stabilizer that improves color and processing stability during recovery, drying, compounding, processing and end use. Synergism is realized when this product is combined with other stabilizers such as hindered phenols. It may be added alone or in combination with the monomers and/or in antioxidant emulsions during recovery and/or during compounding.

Chemical Structure

Trisnonylphenyl Phosphite⁽¹⁾ C₄₅H₆₉O₃P
 Chemical Abstract Number: 26523-78-4



Typical physical properties of WESTON™ TNPP phosphite

Appearance	Clear liquid
Specific Gravity @ 25°C/15.5°C	0.980-0.992
Color (Pt - Co)	75 max.
Flash Point (Pensky - Martens Closed Cup)	207°C (405°F)
Density(lb/gal @ 25°C) (g/ml @ 25°C)	8.2 0.98
Vapor Pressure @ 6 mm/Hg	245°C (472°F)
Formula Weight (g/mol)	688
Viscosity, cps @ 60°C (140°F)	250
Acid No. (mg KOH/g)	0.05 max
Refractive Index @ 25°C (77°F)	1.5255-1.5280
Free Nonylphenol (%)	3.0 max.
Phosphorus Content (%)	4.1-4.5
Chlorine Content	<25 ppm
Free Phenol	<50 ppm
Specific Heat mcal/mg°C	0.4
Thermal Conductivity gcal/(sec)(cm ²)(°C/cm)	0.0003
Auto-ignition Temperature	439°C (822°F)

Features

- Low color
- Low nonylphenol content

Solubility


- Soluble in most common aprotic organic solvents
- Insoluble in water

Regulatory Status

For details please contact SI Group Regulatory Affairs

Viscosity versus Temperature

WESTON™ TNPP phosphite can be heated to facilitate transfer in-plant. The following viscosity versus temperature graph can be used for proper selection of metering and pumping equipment. The following data shows a wide range of temperatures, however, the maximum recommended storage temperature is 80°C.

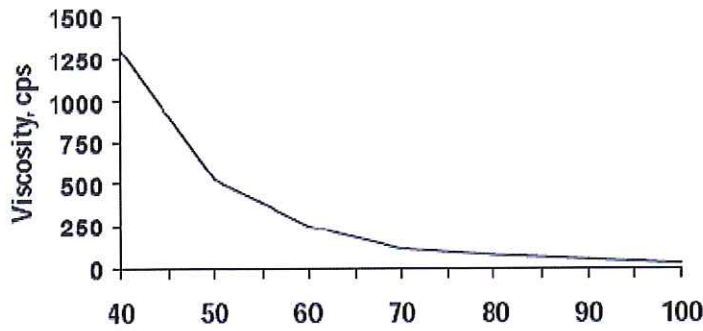


Viscosity, cps	Temperature / °C
15,000	15
6,000	25
1,300	40
525	50
395	55
250	60
115	70
80	80
50	90
32	100
21	110
18	120

The foregoing product brand is a trademark of SI Group USA (USAA), LLC and SI Group Switzerland (CHAA) GmbH. SI Group, The Substance Inside and the SI Group logo are Reg. U.S. Pat. & Tm Off. and in additional countries, to SI Group, Inc.

The information presented herein is believed to be accurate and reliable, but is presented without guarantee or responsibility on the part of SI Group, Inc. and its affiliated companies to ensure the accuracy or reliability of the information. Customers should contact SI Group account representatives for current information. It is the responsibility of the user to comply with all applicable laws and regulations relating to use of the product and to provide for a safe workplace. The user should consider all information contained herein only as a guide, and should take precautions that the user considers necessary or prudent to promote a safe work environment, such as considering all applicable health and safety hazards, developing safe work practice procedures and properly instructing employees, and reviewing the Safety Data Sheet (SDS) and product label for safety information.

Specific gravity is the ratio of density of any substance to the density of a reference substance (water). It is a unitless value. The data shown here was generated at 1 ATM and the temperature (C) as noted on the graph.

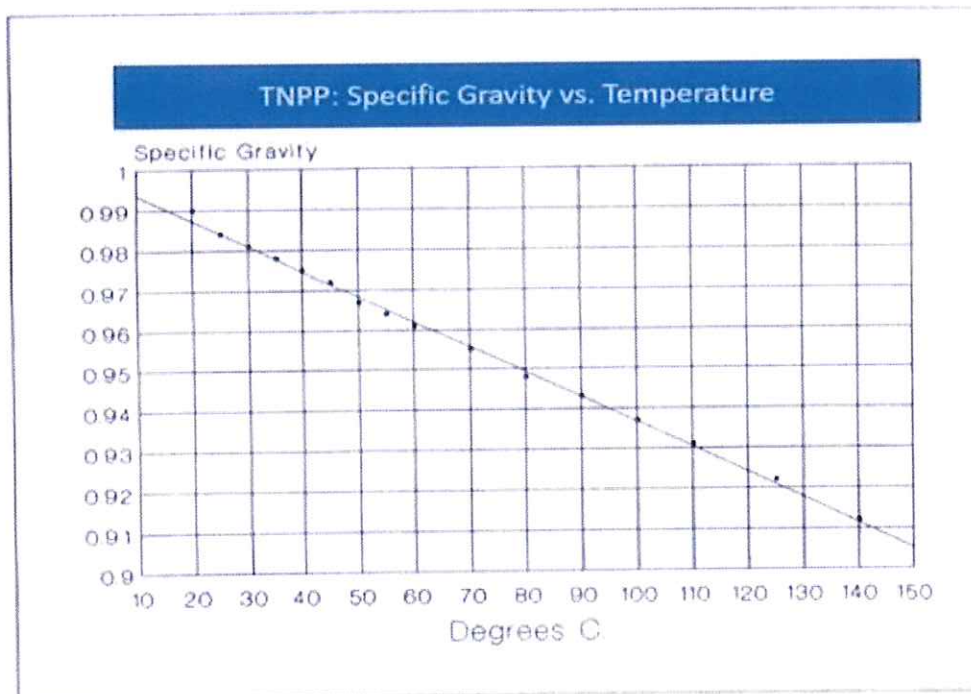

Storage and Handling

The product may be stored at least one and one half (1½) years in sealed containers. Containers should be stored in a cool, dry area. Extended storage at elevated temperatures or exposure to direct heat could decrease product shelf life. Containers should be kept sealed when not in use. If stored outside in cold weather, the drums should be warmed to facilitate pouring. Open drums should be used as soon as possible (within a maximum of 4 months) to avoid hydrolysis, especially during humid weather.

For additional handling and toxicological information consult the SI Group Material Safety Data Sheet.